

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner
 US Department of Commerce
 United States Patent and Trademark
 Office, PCT
 2011 South Clark Place Room
 CP2/5C24
 Arlington, VA 22202
 ETATS-UNIS D'AMERIQUE
 in its capacity as elected Office

Date of mailing (day/month/year) 30 November 2000 (30.11.00)	
International application No. PCT/EP00/02860	Applicant's or agent's file reference 101678/VRD
International filing date (day/month/year) 30 March 2000 (30.03.00)	Priority date (day/month/year) 06 April 1999 (06.04.99)
Applicant EKMAN, Jani et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

03 November 2000 (03.11.00)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Juan Cruz Telephone No.: (41-22) 338.83.38
---	---

REC'D 16 JUL 2001

WIPO

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

14

Applicant's or agent's file reference 101678/VRD/CW/SJW	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/EP00/02860	International filing date (day/month/year) 30/03/2000	Priority date (day/month/year) 06/04/1999
International Patent Classification (IPC) or national classification and IPC H04Q7/38		
Applicant NOKIA NETWORKS OY		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.


2. This REPORT consists of a total of 6 sheets, including this cover sheet.

- ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 13 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand 03/11/2000	Date of completion of this report 12.07.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Reeck, G Telephone No. +49 89 2399 7308



INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/EP00/02860

I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

Description, pages:

1-7,10-12,16,17	as originally filed		
8,9,13-15	as received on	25/05/2001	with letter of 23/05/2001

Claims, No.:

1-11	as originally filed
------	---------------------

Drawings, sheets:

1/8-8/8	as received on	25/05/2001	with letter of 23/05/2001
---------	----------------	------------	---------------------------

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/EP00/02860

- ☐ the description, pages:
☐ the claims, Nos.:
☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-11
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-11
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-11
	No:	Claims	

2. Citations and explanations
see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:
see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:
see separate sheet

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/EP00/02860

Re Item V

Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Reference is made to the following documents:

D1: J. WANG ET AL.: 'Wireless Voice-over -IP and Implications for Third-generation Network Design' BELL LABS TECHNICAL JOURNAL, 1 July 1998 (1998-07-01) - 1 September 1998 (1998-09-01), pages 79-97, XP000782375 NJ, USA

D2: G. THOM: 'H.323: The Multimedia Communications Standard for Local Area Networks' IEEE COMMUNICATIONS MAGAZINE, 1 December 1996 (1996-12-01), pages 52-56, XP000636454 NY, USA

2. Document D1 (see in particular pages 79-84) is regarded as being the closest prior art to the subject-matter of **Claim 1**, and discloses a model of wireless Voice-over-IP that uses conventional circuit voice over the air and employs a gateway like an H.323 within the wireless Core Network to convert the voice to IP packets (and vice versa).

2.1 The subject-matter of **Claim 1** is distinguished from the disclosure of D1 in using a conference call facility for handing over a call with a mobile station from a first communication channel to a second one.

2.2 This feature results in the possibility of mobility with reduced data loss.

Hence, the technical problem solved is providing the execution of a handover in a Wireless Intranet Office system.

2.3 Document D2 does not disclose a call with a mobile station and thus no teachings about the execution of a handover are given.

2.4 Since none of the cited documents, neither taken alone nor taken in combination with each other, hints at the execution of a handover in a Wireless Intranet Office system, **Claim 1** therefore meets the requirements of novelty and inventive step and thus satisfies the criterion set forth in Article 33(1)-(4) PCT.

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/EP00/02860

2.5 **Claims 2-7** are dependent on Claim 1 and, as such, also meet the requirements of the PCT with respect to novelty and inventive step (Article 33(1)-(4) PCT).

3. The same argumentation is also valid for the method according to **independent Claim 8** and its **dependent Claims 9-11** representing the same combination of features as apparatus Claims 1-5, but formulated as a method.

Thus, the subject-matter of **Claims 8-11** also meets the requirements of novelty and inventive step and thus satisfies the criterion set forth in Article 33(1)-(4) PCT.

Re Item VII

Certain defects in the international application

1. Independent Claims 1 and 8 are not in the two-part form required by Rule 6.3(b) PCT, which in the present case is deemed appropriate, with those features known in combination from document D1 being placed in the preamble (Rule 6.3(b)(i) PCT) and with the remaining features being included in the characterising part (Rule 6.3(b)(ii) PCT).
2. The features of the claims are not provided with reference signs placed in parentheses (Rule 6.2(b) PCT).
3. The sheets of the description and claims are not provided with an adequate line numbering (Rule 11.8 PCT).
4. In the present application, according to Rule 11.13(n) PCT, a separate sheet listing all reference signs would have been applicable, also in order to face the clarity problems as mentioned in Section VIII below.

Re Item VIII

Certain observations on the international application

1. The independent Claims 1 and 8 refer to the feature "a communications network", while throughout the description all corresponding references relate to a cellular mobile communication system (pages 1, 4 and 7). This leaves the reader in doubt as to the intended meaning of "a communications network" which in the claims is broader than justified by the extent of the description and drawings, thereby rendering the definition of the subject-matter of Claims 1 and 8 unclear (Article 6 PCT and PCT Guidelines III-4.1 and III-6.1). Claims 1 and 8 should have been amended also with an aim at removing this intrinsic inconsistency.

2. The terminology and the signs shall be consistent throughout the application (Rule 10.2 PCT).

This requirement is not met with respect to the following features being denoted differently in the claims and the description:

conference call facility	Multipoint Control Unit MCU (pages 4 and 15);
gateway	Intranet Mobile Cluster interface (page 10);
means for handing over	gatekeeper (pages 7 and 15).

As a consequence, the reader is left in doubt as to whether the same or different features are meant, contrary to the requirement of Article 6 PCT (see also Section VII above).

3. The expressions "gatekeeper" in the description and "central controller" used in Claims 1 and 8 leave the reader in doubt as to the meaning of the technical features to which they refer (whether they represent the same feature with respect to the operation of a zone of the network (pages 4 and 10) and the function as main controller (page 10), or whether they represent different units with respect to the wording of Claim 6), thereby rendering the definition of the subject-matter of the claims unclear (Article 6 PCT and PCT Guidelines III-4.1 and III-4.3). The claims should have been amended e.g. by harmonisation of the terminology used.

Figure 2 is a block diagram illustrating the communication pathways between components of the WIO system before the mobile station handover according to a first embodiment;

Figure 3 is a block diagram illustrating the communication pathways between components of the WIO system during a first period of the mobile station handover according to a first embodiment;

Figure 4 is a block diagram illustrating the communication pathways between components of the WIO system during a second period of the mobile station handover according to a first embodiment;

Figure 4a is a diagram illustrating the multiplexing within the MCU; and

Figure 5 is a block diagram illustrating the communication pathways between components of the WIO system during a third period of the mobile station handover according to a first embodiment.

Reference is first made to Figure 1a to describe the context of this invention.

A WIO system can be provided in an office and operator environment based on an IP (Internal Protocol) based packet network. In practice there are two Local Area Networks (LANs) or Intranets which are operable to carry standard packet-switched data. These are connected via, e.g., a wide area network (WAN).

An IP (Internet Protocol) router 10 can be used in the LAN environment as can an IP switch or hub. The office environment is denoted by a dashed box 100.

One or more mobile stations (MS) 1 communicate, i.e. transmit signals to and/or receive signals from, a base transceiver station (BTS) 2. The base transceiver station 2 used in the WIO system is similar to base transceiver stations used in conventional GSM mobile communications systems in that it is connected to, and operates in conjunction with, a controller. In a conventional GSM system, the controller is termed a base

station controller (BSC); in WIO, however, the controller is represented by an Intranet Mobile Cluster interface (IMC) 3, the function of which will be described later. Also, some of the functions of a conventional BSC are located in an A-interface gateway 8 or WIO gatekeeper 4.

The base transceiver station 2 therefore receives signals transmitted by the mobile unit 1 and forwards them to the Intranet Mobile Cluster interface 3. The Intranet Mobile Cluster interface 3 is also connected to the IP-router 10.

A WIO Gatekeeper (WGK) 4 is connected to the IP-router 10 as is an H.323 terminal (H.323) 5. The H.323 terminal 5 may be represented by a computer terminal which supports voice information or an H.323 application.

One or more telephone or facsimile units (T/F) 12 are connected to a private branch exchange (PBX) 6 as in a conventional fixed-line office communication system. The private branch exchange 6 is connected to the IP-router 10 via an interface (INT) 7. The private branch exchange 6 is additionally connected to a Public Switched Telephone Network (PSTN) 13 such as a conventional BT network.

The IP-router 10 is connected to an external IP-based network 30, such as a Wide Area Network (WAN) or the Internet.

For extra-office communication, the IP-based network 30 is connected to a second IP-router 20, on the operator side, which may also be represented by a LAN or Intranet.

Connected to the second IP-router are two interfaces, an A-interface gateway (AGW) 8 and an ISDN gateway (IGW) 11, and an intranet location register (ILR) 9. The AGW 8, ISDN gateway 11 and Intranet location register 9 are also connected to a standard GSM network as used in a conventional mobile communications system. The IP-telephony gateway is additionally connected to the

The payload signal PAYLOAD, still in packet format, is transmitted from the second IP-router 20 to the A-intranet gateway 8. The A-intranet gateway converts the payload signal from the packet-based format used to transmit it on the IP-routers and Internet (10, 20, 30) into a conventional GSM format such as a time-slot format.

The receive signal RX, in timeslot format, is forwarded from the A-interface gateway 8 to the Mobile Services switching centre 26 (MSC) in the GSM Network from where it is transmitted to the respective Base Station Controller/Base transceiver station 24, under which the mobile station B is operating, in a manner conventional to GSM.

Calls which are completely internal to the WIO system are handled slightly differently as shown in Figure 1c. The RF transmission signal TX, in timeslot format, transmitted by the mobile A is again sent to the BTS 2 which performs down conversion of the signal. The down-converted signal is forwarded to the intranet mobile cluster interface 3 which performs format conversion to generate a PAYLOAD packet and a CTRL packet.

From the intranet mobile cluster interface 3, the control signal CTRL is sent to the Gatekeeper 4 which determines if the mobile station B is within the WIO system and, if so, in which H.323 Zone it is located. A H.323 zone is defined as the collection of all terminals, gateways and multipoint control units managed by a single gatekeeper.

If the mobile station B is operating in the same H.323 Zone as the mobile station A, i.e. under the same Gatekeeper which then starts the paging procedure, the Gatekeeper 4 will receive a paging response from the destination intranet mobile cluster interface 23, i.e. the intranet mobile cluster interface under which the mobile station B is operating, and then routes the payload along the IP-router 10 to that destination intranet mobile cluster interface.

The destination intranet mobile cluster interface 23 converts the payload signal into a timeslot format. It is then sent, via its base transceiver station 24 which performs up-conversion to RF, to the mobile station B.

As shown in Figure 1d, if the gatekeeper 4 determines that the mobile station B is in a different H.323 Zone to the mobile station A, the gatekeeper 4 routes the payload signal to the destination gatekeeper 4', i.e. the gatekeeper under which the mobile station B is operating. If the destination gatekeeper receives a paging response from one of the intranet mobile cluster interfaces, it then routes the call signal to the intranet mobile cluster interface and out to the mobile station B, via its base transceiver station 24, in a manner similar to that described above.

Figures 2 to 6 show, respectively, the communication pathways before, during and after a handover according to an embodiment of the present invention. The following description illustrates the handover of a mobile station A from a first cell of the WIO network to a second cell of the WIO network whilst in communication with a mobile station B also located within the network.

In this context, the components of the first cell, i.e. the cell out of which mobile station A will move, are termed the source components while the components of the second cell, i.e. the cell into which mobile station A will move, are termed the target components. The components of the cell in which mobile station B is located are termed the destination components. Note that the destination mobile station could be any other endpoint or terminal such as fixed phone, fax etc.

As shown in Figure 2, before the handover, mobile station A communicates with mobile station B by transmitting an RF, timeslot-based signal to the source base transceiver station 2 which down-converts the signal and sends it to the source

intranet mobile cluster interface 3. The source intranet mobile cluster interface converts the voice data into a packet-based format (PAYLOAD) and sends it, via the MCU 28, to the destination IMC 23. A CTRL 1 message is formulated and sent to the gatekeeper 4. The gatekeeper 4 identifies from the CTRL message the destination terminal as the mobile station B and then sends a further packet-based signal CTRL, via the IP-router 10, to the destination intranet mobile cluster interface 23. The destination intranet mobile cluster interface 23 converts the PAYLOAD into GSM timeslot format and forwards it to the destination base transceiver station 24 which up-converts the signal to RF and transmits it to mobile station B.

When the IMC 3 determines, in the manner described earlier, that a handover of MSA to another cell is required the IMC issues handover required indication HR1. The IMC 3 also generates, based on the levels of the signals the MSA has reported as having been received from the surrounding base transceiver stations, a list of suitable target base transceiver stations 22 to which the call could be handed over.

The gatekeeper 4 is provided by the HR1 with a candidate list which is a list of cell identifiers (i.e. local Area Code and cell identifier) which the gatekeeper resolves into a choice of target gateways. For the purposes of the following description it is assumed that all the calls are switched via the MCU 28. However Q931 signalling (CTRL) does not go through the MCU. The gatekeeper 4 controls the MCU via MC-CTRL packets.

When the gatekeeper 4 receives the HRI message and the candidate list from the source intranet mobile cluster interface 3, it selects a target IMC 21 from the candidate list.

The gatekeeper 4 then invites the target intranet mobile cluster interface 21 to connect to the multipoint control unit 28 so as to form a multipoint conference. In this manner, a communications link between the target intranet mobile cluster

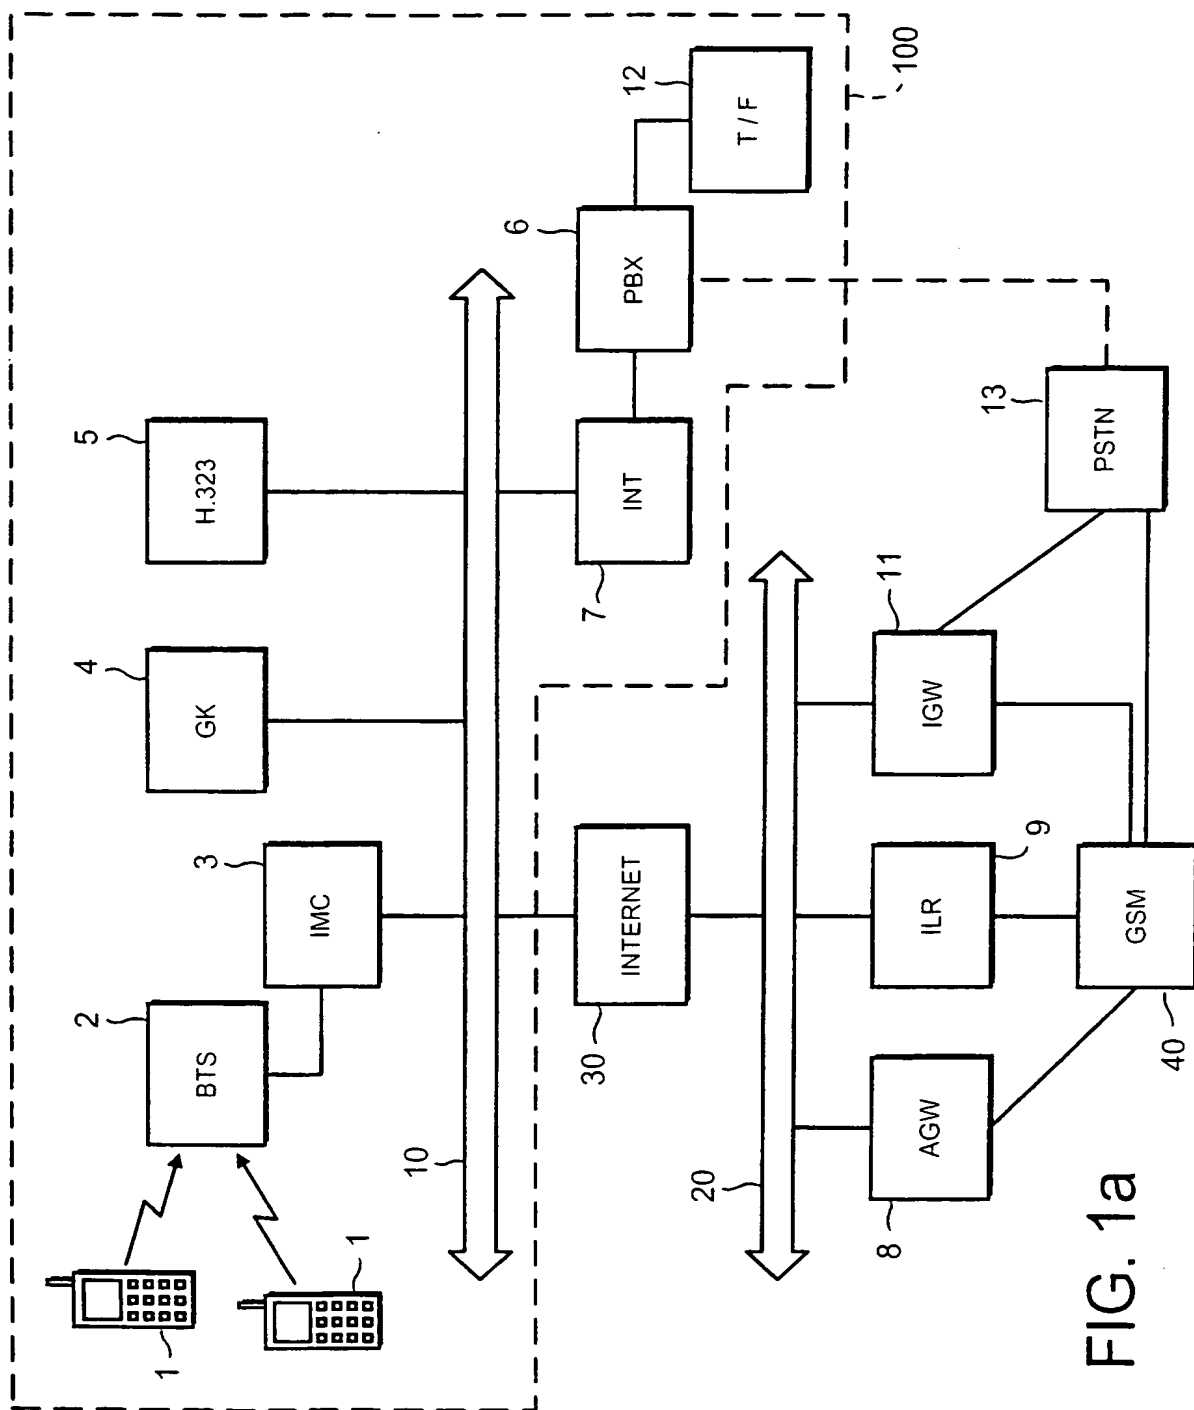
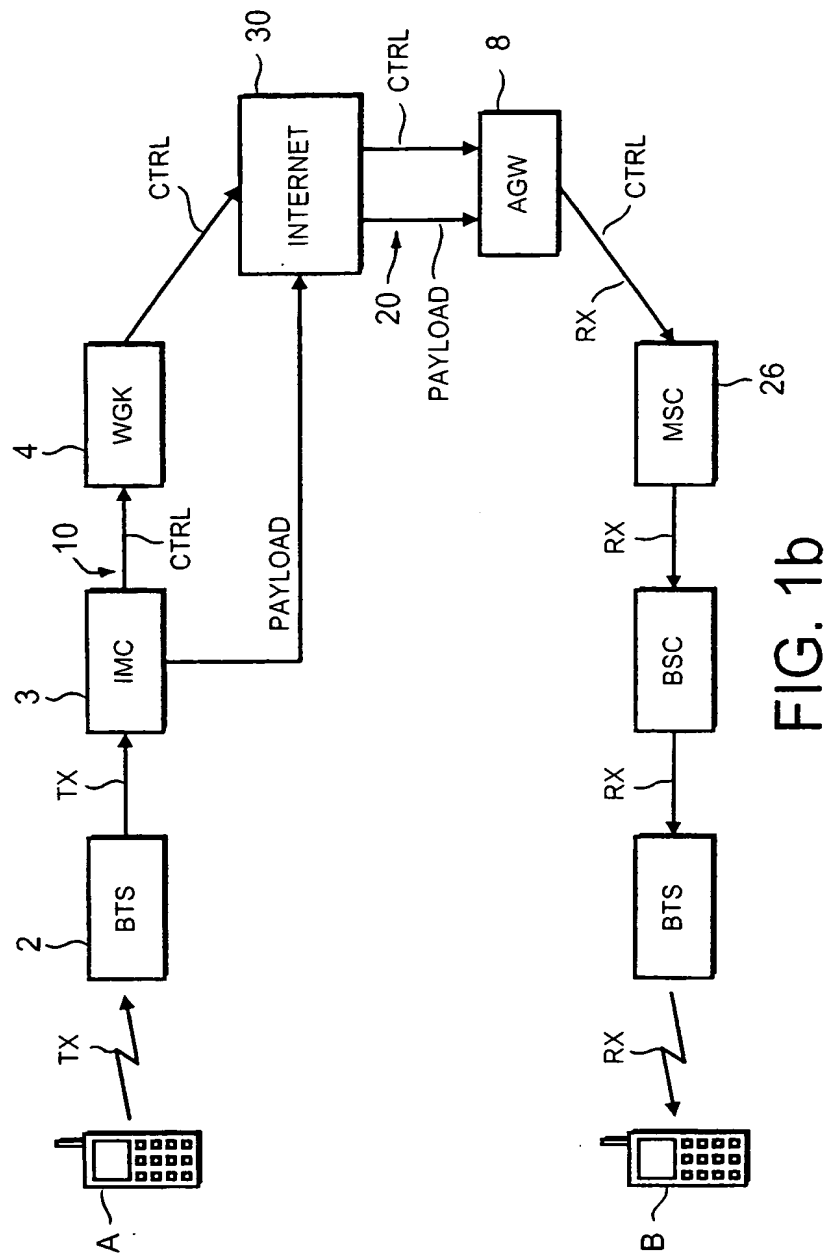


FIG. 1a



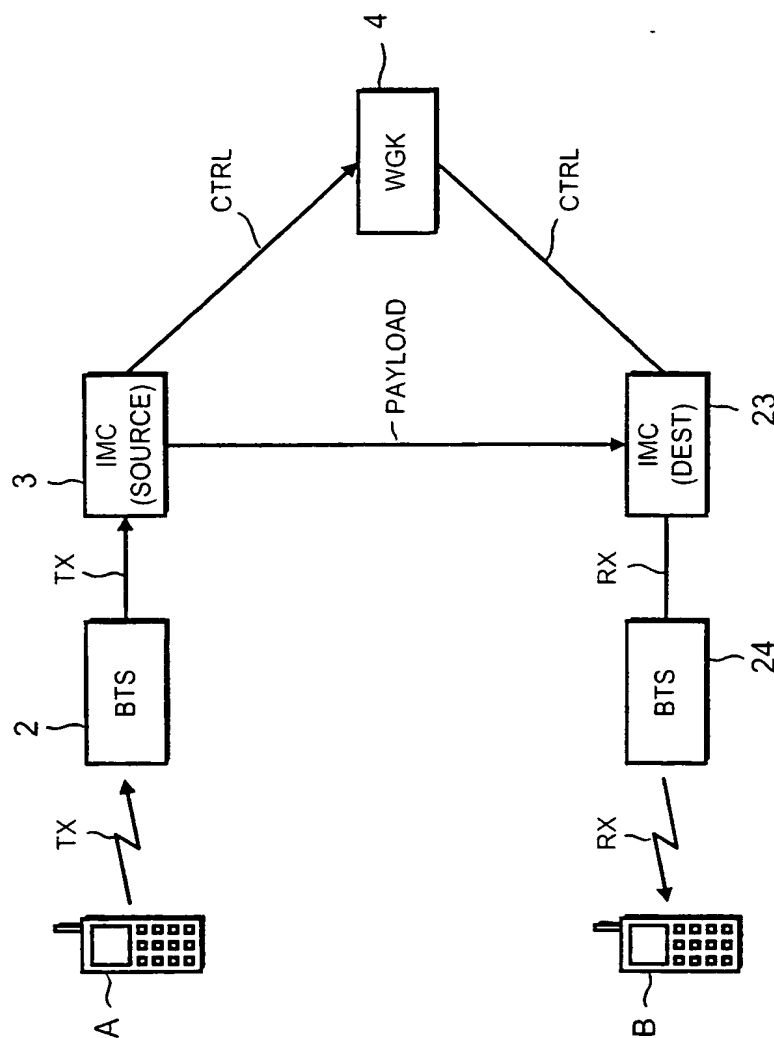


FIG. 1c





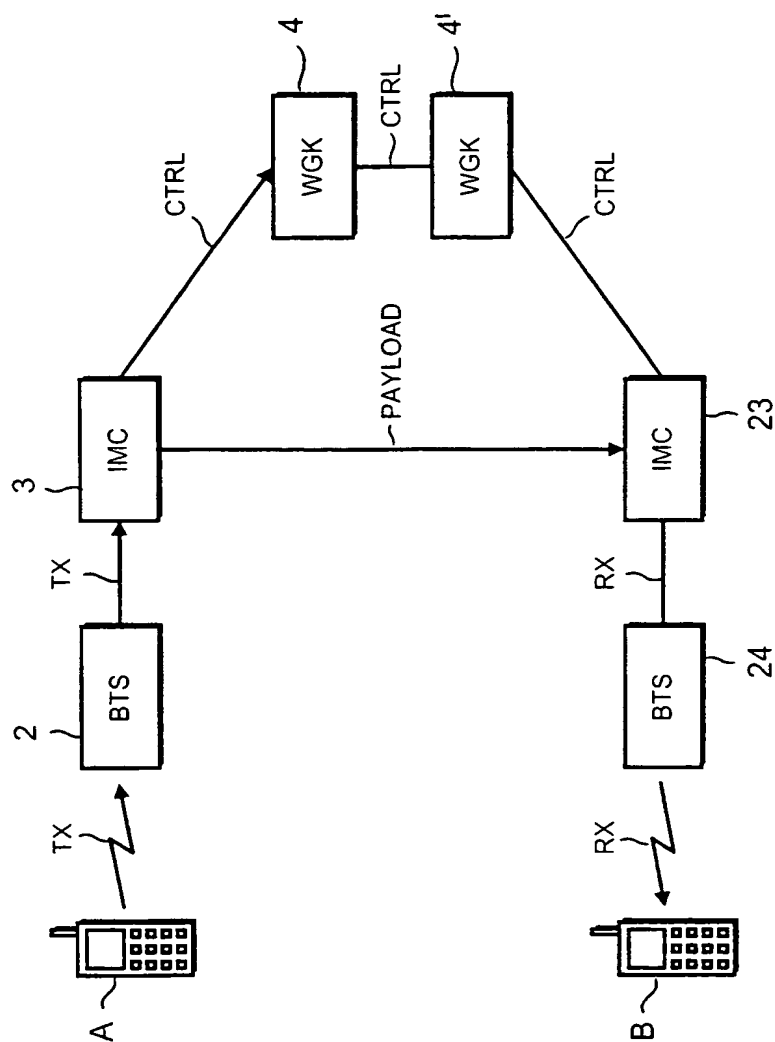


FIG. 1d

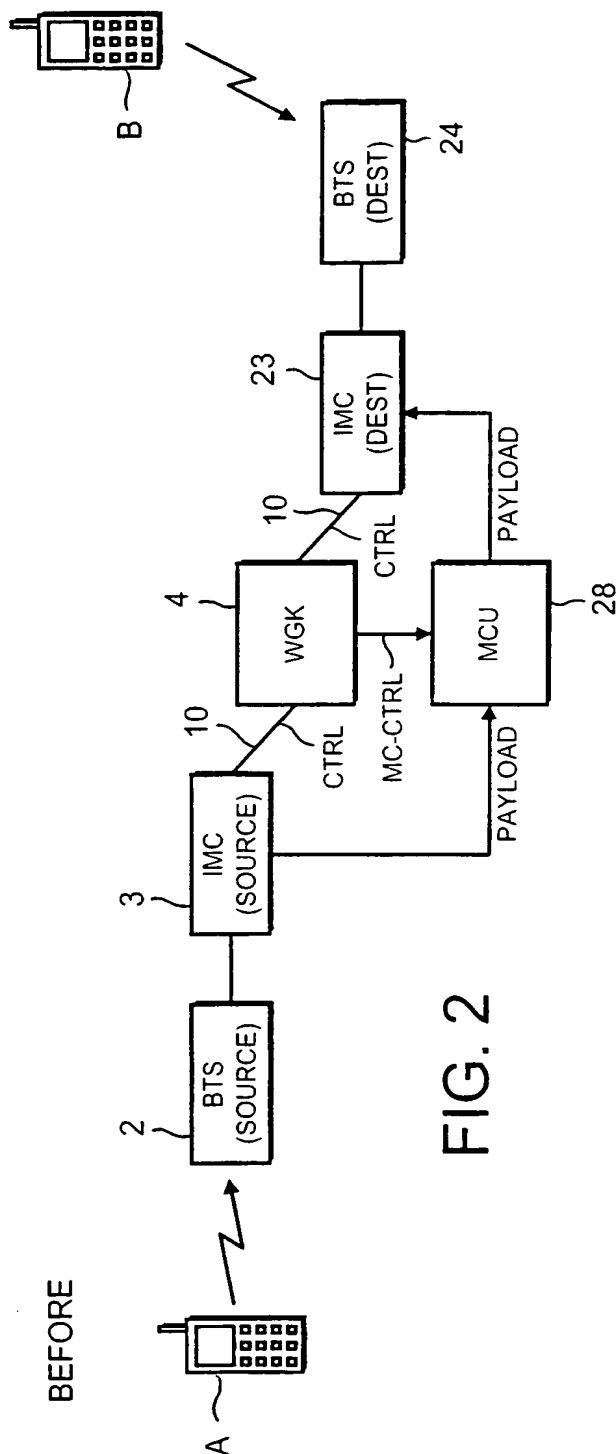

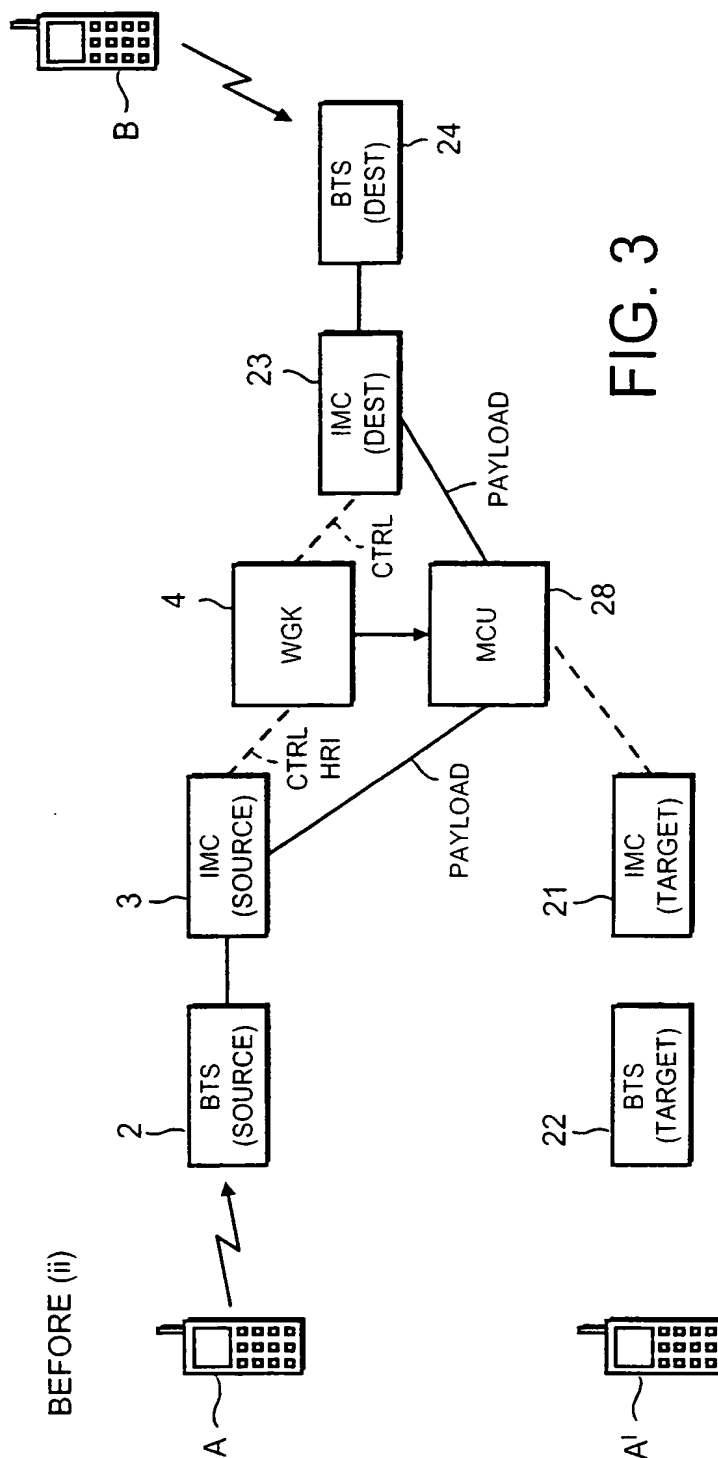

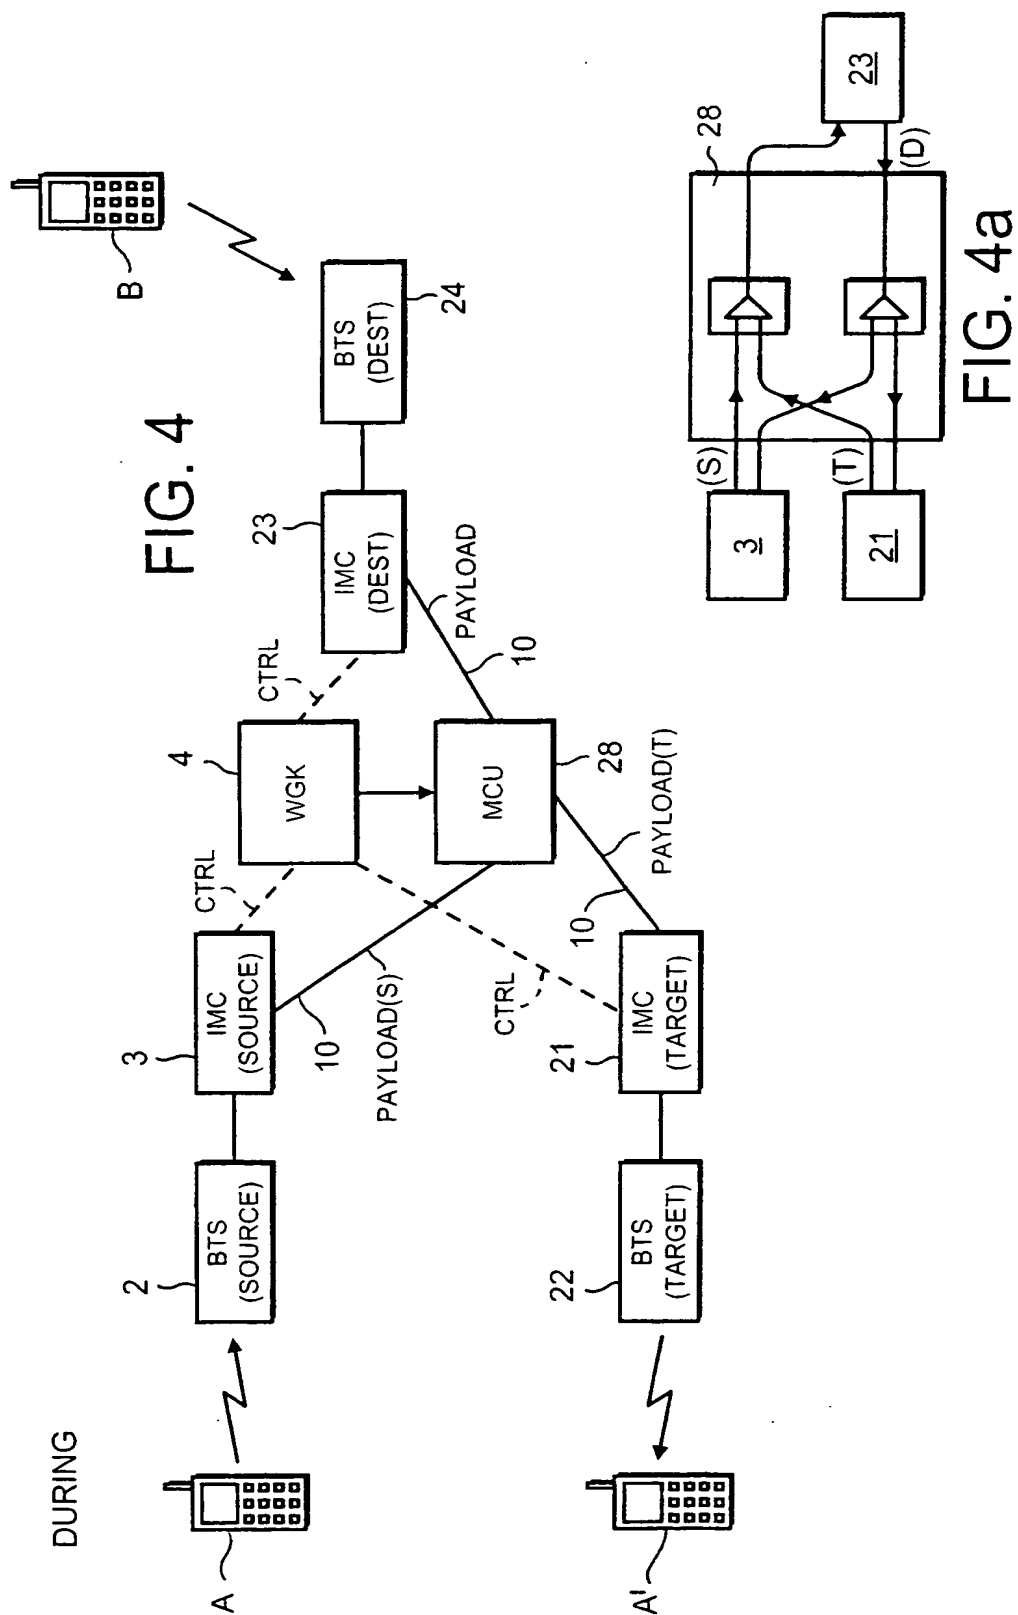

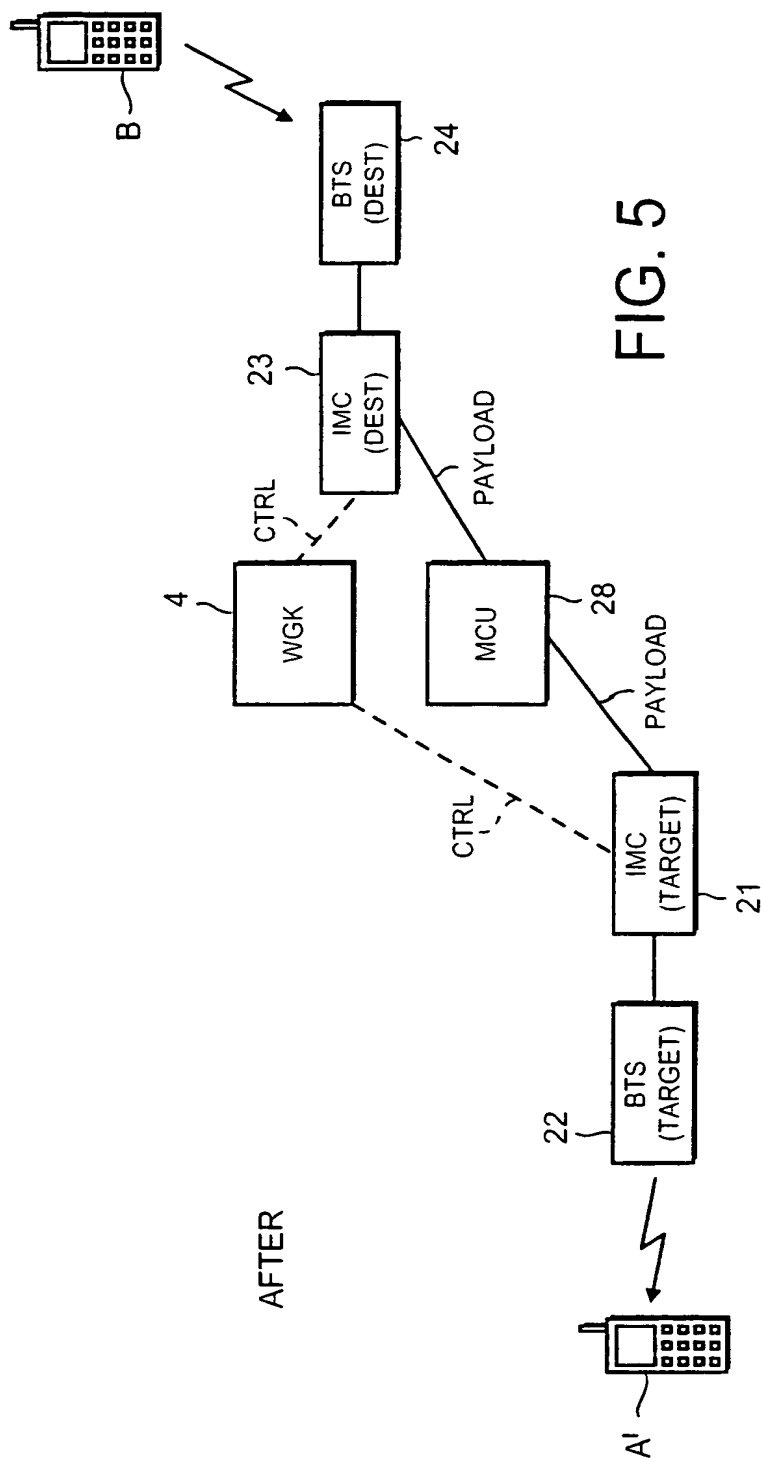




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/38, H04M 3/56	A1	(11) International Publication Number: WO 00/60894 (43) International Publication Date: 12 October 2000 (12.10.00)
(21) International Application Number: PCT/EP00/02860 (22) International Filing Date: 30 March 2000 (30.03.00) (30) Priority Data: 9907803.2 6 April 1999 (06.04.99) GB (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): EKMAN, Jani [FI/FI]; Puutarhakatu 12 C 26, FIN-33210 Tampere (FI). SUON- TAUSTA, Panu [FI/FI]; Vaajakatu 5 B 39, FIN-33720 Tam- pere (FI). (74) Agents: DRIVER, Virginia, Rozanne et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: HANDOVER IN A MOBILE COMMUNICATION SYSTEM USING CONFERENCE FACILITY

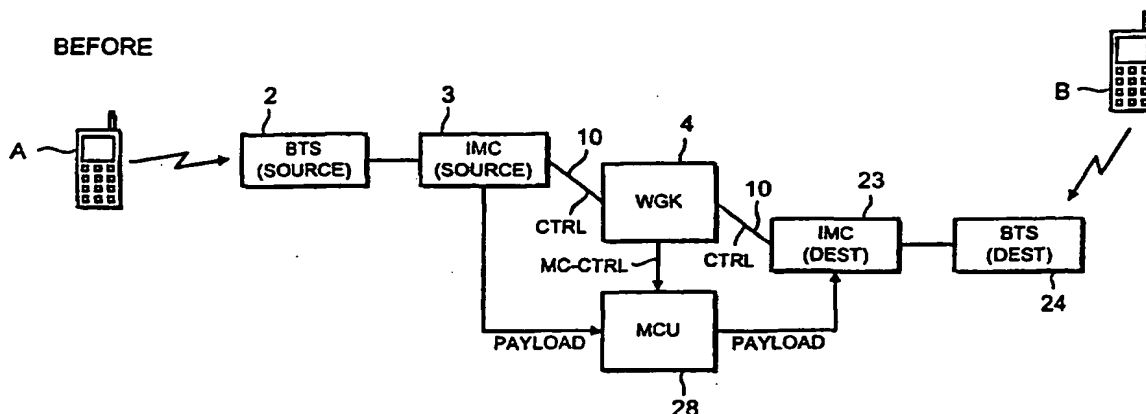

(57) Abstract

A communications network comprises a central controller which operates to control a zone of the network and which provides a conference call facility with at least one gateway engaged in a call with a mobile station via a first communication channel, means for generating a hand-off required indication indicating that handover of the call is needed, means at the central controller for receiving said hand-off required indication and opening a conference call channel as a second communication channel for the call and means for handing over said call from the first to the second communication channels and, if the handover is successful, causing the first communication channel to be closed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HANDOVER IN A MOBILE COMMUNICATION SYSTEM
USING CONFERENCE FACILITY

The present invention is related to handovers in a mobile communication system and particularly, but not exclusively, to mobile station handovers in an IP-based telecommunications network.

Prior art office-based communications systems usually operate conventional fixed-line telephone units linked via an internal switchboard or PBX (private branch exchange). Such fixed-line systems are able to provide relatively high voice quality. However, user mobility is severely impaired.

The advent of digital mobile technologies such as GSM, however, means that mobile systems can now provide equivalent, if not higher, voice quality than fixed-line systems. Mobile systems also allow greater freedom of movement for the user within the office than do fixed-line systems.

WIO (Wireless Intranet Office) is a proprietary communications system developed by the applicants which introduces the concept of utilising mobile telephone units, such as conventional GSM mobile stations, in an office environment. The system makes use of a known concept called Internet Telephony or Voice-over-IP.

Voice-over-IP is a technology which allows sound, data and video information to be transmitted over existing IP-based Local or Wide Area Networks or the Internet. The technology thus provides for convergence and integration of three different media types over the same network.

Prior to the advent of Voice-over-IP, offices often operated three separate networks for the transmission of these media types. As indicated above, fixed-line telephone systems coupled to an in-house PBX provided for voice communication, an office-based LAN or Intranet (i.e. a packet-switched internal network),

comprising computer terminals linked via network cards and under the control of a server station, provided for the transmission of ``conventional'' computer data and video cameras linked to monitors via fixed line or remote transmission link provided for video communication.

Voice-over-IP effectively combines these three media types such that they can be transmitted simultaneously on the same packet-switched network or IP-router throughout the office environment and beyond the confines of the office.

In order to provide for such media convergence, Voice-over-IP often uses a specific ITU (International Telecommunication Union) standard protocol to control the media flow over the Intranet. One common standard protocol used in Voice-over-IP systems, and the one used in the WIO system, is termed H.323.

H.323 is an ITU standard for multimedia communications (voice, video and data) and allows multimedia streaming over conventional packet-switched networks. The protocol provides for call control, multimedia management and bandwidth management for both point-to-point (2 end-users) and multipoint (3 or more end-users) conferences. H.323 also supports standard video and audio codecs (compression/decompression methods such as MPEG) and supports data sharing via the T.120 standard.

Furthermore, H.323 is network, platform and application independent allowing any H.323 compliant terminal to operate in conjunction with any other terminal.

The H.323 standard defines the use of three further command and control protocols:

- a) H.245 for call control;
- b) Q.931 based protocol for call signalling; and

c) The RAS (Registrations, Admissions and Status) signalling function.

The H.245 control protocol is responsible for control messages governing the operation of the H.323 terminal including capability exchanges, commands and indications. Q.931 is used to set up a connection between two terminals. RAS governs registration, admission and bandwidth functions between endpoints and gatekeepers (defined later).

For a H.323 based communication system, the standard defines four major components:

1. Terminal
2. Gateway
3. Gatekeeper
4. Multipoint Control Unit (MCU)

Terminals are the user end-points on the network, e.g a telephone or fax unit or a computer terminal. All H.323 compliant terminals must support voice communications, but video and data support is optional.

Gateways connect H.323 networks to other networks or protocols. For an entirely internal communications network, i.e. with no external call facility, gateways as such are not required. In that case, internal intranet mobile clusters (IMCs) act as internal gateways.

Gatekeepers are the control centre of the Voice-over-IP network. It is under the control of a gatekeeper that most transactions (communication between two terminals) are established. Primary functions of the gatekeeper are address translation, bandwidth management and call control to limit the number of simultaneous

H.323 connections and the total bandwidth used by those connections. An H.323 "zone" is defined as the collection of all terminals, gateways and multipoint-control units (MCU - defined below) which are managed by a single gatekeeper.

Multipoint Control Units (MCU) support communications between three or more terminals. The MCU comprises a multipoint controller (MC) which performs H.245 negotiations between all terminals to determine common audio and video processing capabilities, and a multipoint processor (MP) which routes audio, video and data streams between terminals.

The conventional Voice-over-IP system described herein above normally utilise standard fixed-line telephone systems which are subject to the disadvantages outlined above, namely the lack of mobility and the lack of user commands.

The WIO concept takes Voice-over-IP further in that it provides for the use of conventional mobile telephone units, such as GSM mobile stations, within the Voice-over-IP system. To provide for such mobile communications within an intra-office communication network, WIO combines known Voice-over-IP, as described above, with conventional GSM-based mobile systems.

Thus, intra-office calls are routed through the office intranet and extra-office calls are routed conventionally through the GSM network. Such a system provides most or all of the features supported by the mobile station and the network such as telephone directories, short messaging, multiparty services, data calls, call barring, call forwarding etc. WIO, therefore, provides for integrated voice, video and data communications by interfacing an H.323-based voice-over-IP network with a GSM mobile network.

The WIO system is a cellular network, similar to the conventional GSM network and is divided into H.323 Zones as described above. One H.323 Zone may comprise a number of cells. Two or more H.323 zones may be contained within an administrative domain. The

allocation of H.323 zones to an administrative domain is an issue primarily concerning billing and is therefore not relevant to this invention.

Given the cellular nature of the WIO system, a major issue to be solved is that of handovers. As a mobile station moves from cell to cell it reports its location to the BTS or equivalent controller. When it moves from one zone to another, a handover is needed to a different gateway. A similar consideration applies to mobile stations in the conventional GSM network.

(In such conventional GSM systems, the need for a handover of a mobile station to a different cell of the network is normally determined by the mobile station measuring the strength of signals transmitted from several base transceiver stations.

(During the time that it is in a particular cell, the mobile station continuously receives signals from several base transceiver stations in adjacent cells. It sends the measurement reports to the BTS/BSC which makes a decision when handover is needed. If the level of a signal transmitted by a base transceiver station, located in a different cell from that of the mobile, reaches a certain threshold level T1 in relation to that of the base transceiver station located in the mobile station's current cell, the BSC will determine that a handover to that cell is required and will issue a handover required indication to the network controller (main switching centre).

In a similar manner, the IMC of a WIO system is able to determine the requirement for handover within the WIO network by comparing the signal strengths of the signals reported by the mobile station.

However, added complexities arise for handovers in the WIO system since a mobile unit operating therein is not only able to move between cells within the WIO system, but also between zones and even between the WIO system itself and an external GSM network.

It can be seen, therefore, that there are several different types of handovers which may need to be executed in the normal operation of a WIO system. These types of handovers are:

- a) The handover of a mobile from one WIO cell to another whilst engaged in a call.
- b) The handover of a mobile from one WIO zone to another whilst engaged in a call.
- c) The handover of a mobile from a cell within the WIO system to a cell within an external GSM system.
- d) The handover from a cell within an external GSM system to a cell within the WIO system.

The call can involve a mobile station and any other endpoint or terminal, fixed or mobile.

According to one aspect of the present invention, therefore, there is provided a communications network comprising: a central controller which operates to control a zone of the network and which provides a conference call facility; at least one gateway engaged in a call with a mobile station via a first communication channel; means for generating a hand-off required indication indicating that handover of the call is needed; means at the central controller for receiving said hand-off required indication and opening a conference call channel as a second communication channel for the call; and means for handing over said call from the first to the second communication channels and, if the handover is successful, causing the first communication channel to be closed.

According to another aspect of the present invention there is provided a method of effecting handover of a call in which at least one mobile station is engaged via a first communication channel in a communications network comprising a central

controller which operates a zone of the network and provides a conference call facility, in which method: a hand-off required indication is issued indicating that handover of the call is needed; the central controller receives said hand-off required indication and opens as a second communication channel a conference call channel; handover of said call is effected from said first to said second communication channel; and if the handover is successful the first communication channel is closed.

Thus, the present invention provides handover control using existing conference call functionality rather than having to provide new functionality with which to control the handover.

For a better understanding of the present invention, and to show how the same may be carried into effect, the present invention will now be described in more detail with reference to the accompanying drawings in which:

The means for generating a hand-off required indication is preferably comprised in the gateway or, for example, a mobile station.

The means for handing over may be a gatekeeper.

The communications network may be a cellular network.

Figure 1a is a block diagram showing some of the components used in the implementation of a WIO system;

Figure 1b is a block diagram illustrating the communication pathways used during a call between an internal mobile station and an external mobile station;

Figure 1c is a block diagram illustrating the communication pathways used during a call between two internal mobile stations operating under the same gatekeeper;

Figure 1d is a block diagram illustrating the communication pathways used during a call between two internal mobile stations operating under different gatekeepers;

Figure 2 is a block diagram illustrating the communication pathways between components of the WIO system before the mobile station handover according to a first embodiment;

Figure 3 is a block diagram illustrating the communication pathways between components of the WIO system during a first period of the mobile station handover according to a first embodiment;

Figure 4 is a block diagram illustrating the communication pathways between components of the WIO system during a second period of the mobile station handover according to a first embodiment;

Figure 4a is a diagram illustrating the multiplexing within the MCU; and

Figure 5 is a block diagram illustrating the communication pathways between components of the WIO system during a third period of the mobile station handover according to a first embodiment.

Reference is first made to Figure 1a to describe the context of this invention.

A WIO system can be provided in an office and operator environment based on an IP (Internal Protocol) based packet network. In practice there are two Local Area Networks (LANs) or Intranets which are operable to carry standard packet-switched data. These are connected via, e.g., a wide area network (WAN).

An IP (Internet Protocol) router 10 can be used in the LAN environment as can an IP switch or hub. The office environment is denoted by a dashed box 100.

One or more mobile stations (MS) 1 communicate, i.e. transmit signals to and/or receive signals from, a base transceiver station (BTS) 2. The base transceiver station 2 used in the WIO system is similar to base transceiver stations used in conventional GSM mobile communications systems in that it is connected to, and operates in conjunction with, a controller. In a conventional GSM system, the controller is termed a base

station controller (BSC); in WIO, however, the controller is represented by an Intranet Mobile Cluster interface (IMC) 3, the function of which will be described later. Also, some of the functions of a conventional BSC are located in an A-interface gateway 8 or WIO gatekeeper 4.

The base transceiver station 2 therefore receives signals transmitted by the mobile unit 1 and forwards them to the Intranet Mobile Cluster interface 3. The Intranet Mobile Cluster interface 3 is also connected to the IP-router 10.

(A WIO Gatekeeper (WGK) 4 is connected to the IP-router 10 as is an H.323 terminal (H.323) 5. The H.323 terminal 5 may be represented by a computer terminal which supports voice information or an H.323 application.

One or more telephone or facsimile units (T/F) 12 are connected to a private branch exchange (PBX) 6 as in a conventional fixed-line office communication system. The private branch exchange 6 is connected to the IP-router 10 via an interface (INT) 7. The private branch exchange 6 is additionally connected to a Public Switched Telephone Network (PSTN) 13 such as a conventional BT network.

(The IP-router 10 is connected to an external IP-based network 30, such as a Wide Area Network (WAN) or the Internet.

For extra-office communication, the IP-based network 30 is connected to a second IP-router 20, on the operator side, which may also be represented by a LAN or Intranet.

Connected to the second IP-router are two interfaces, an A-interface gateway (AGW) 8 and an ISDN gateway (IGW) 11, and an intranet location register (ILR) 9. The AGW 8, ISDN gateway 11 and Intranet location register 9 are also connected to a standard GSM network as used in a conventional mobile communications system. The IP-telephony gateway is additionally connected to the

Public Switched Telephone Network (PSTN) 13.

WIO allows for the use of mobile telephone in the office environment to make both intra- and extra-office calls. The functions of each of the components of Figure 1 will now be described in more detail.

The Intranet Mobile Cluster interface 3 performs similar functions to that of a base station controller (Base Station Controller) in a conventional GSM network such as the management of radio resources and channel configuration and the handling of the Base transceiver station configuration. However, the Intranet Mobile Cluster interface also provides conversion from GSM voice data to packet-based data suitable for transmitting on the packet-based IP Router 10.

During a call, therefore, the Intranet Mobile Cluster interface 3 converts the voice data transmitted by the base station into packet-based data suitable for transmitting on the IP Router 10.

The WIO Gatekeeper 4 is the main controller of the WIO system and has a high processing capability. Its function is to provide control services to the IP Router and the various user terminals. However, the Gatekeeper 4 is also responsible for all of the functions which the H.323 protocol defines to its gatekeeper, including call management and call signalling. The WIO Gatekeeper 4 is able to manage the main different call types such as voice, data, facsimile and conference calls which can be established between a mobile station, a PC terminal and a normal telephone in any combination.

The A-interface gateway 8 handles communication between the WIO environment and the GSM network via the mobile services switching centre (MSC). From the MSC viewpoint, the WIO appears to be a conventional base station controller. The A-interface gateway 8 also provides an interface for an Operations and Maintenance Unit

(O&M - not shown).

The ISDN gateway (IGW) 11 handles communication between the WIO environment and the public telephone network and has an interface to both the MSC and the PSTN 13. The ISDN gateway 11 is used to enable communication mainly from a non-GSM H.323 terminal to a GSM mobile unit outside the WIO network. It also provides for the possibility of communication from a mobile station to a PC. Only GSM mobile stations can be connected to the MSC via the A-interface gateway 8. The WIO Gatekeeper 4 controls the status of the ISDN gateway 11 and sends the information to the O&M unit.

The intranet location register 9 provides the directory services in the WIO system. The purpose of the directory service is to provide storage for mobile station-specific information, such as mobile station identities and supplementary services such as billing accounts for use in the WIO system. All of the mobile stations within the WIO system have an entry in the intranet location register. The WIO Gatekeeper 4 updates the current intranet location register entry of each mobile station allowing the correct mobile number to be accessed in each call. The intranet location register is linked to the home location register (not shown) within the GSM network via a mobile application part (MAP) interface (not shown).

The telephone calls managed by the WIO system can be divided into internal calls and external calls. Internal calls involving a mobile station are those calls where the mobile station and the other terminal involved in the call are located within the WIO system, and external calls involve a mobile station or other terminal which is not located within the WIO system. Calls may also be between H.323 terminals and external PSTN subscribers.

The functions of the WIO system components described above will now be described, with reference to Figure 1b, in the context of a telephone call from a mobile station located within the WIO system (mobile A) to a mobile station located in an external

network such as a GSM network (mobile B)

The mobile station A transmits a radio frequency (RF) transmission signal TX, on a predetermined communication channel, to the base transceiver station 2 in a format conventional to GSM communications systems such as a time-slot format. The communication channel on which the mobile station A transmits the RF transmission signal TX is determined in a manner conventional to GSM communication systems.

The base transceiver station 2 receives the RF transmission signal, down-converts it and then forwards it to the intranet mobile cluster interface 3. In this respect, the base transceiver station 2 and the intranet mobile cluster interface 3 operate in a manner similar to a base transceiver station and a base station controller respectively in a conventional GSM network.

The intranet mobile cluster interface 3 receives the down-converted transmission signal from the base transceiver station 2 and converts the voice data from the conventional GSM time-slot format, to a packet-based format which allows it to be transmitted along the IP-router 10. This is referred to herein as the PAYLOAD. Also, the intranet mobile cluster interface 3 composes a control signal CTRL containing call signalling messages, for example identification of the destination MS B, the IP address corresponding to that MS and/or identification of the source MS A.

The control signal CTRL is then routed, in packet format, via the IP-router 10, to the gatekeeper 4 which, based on the information contained in the control signal CTRL, determines whether the mobile station B is located within the WIO system or external to the WIO system. If the mobile station B lies outside the WIO system, e.g. a conventional GSM mobile unit operating in the GSM network, the gatekeeper 4 causes the control signal CTRL and the payload signal PAYLOAD to be routed along the IP-router 10 to the second IP-router 20 via the external network 30.

The payload signal PAYLOAD, still in packet format, is transmitted from the second IP-router 20 to the A-intranet gateway 8. The A-intranet gateway converts the payload signal from the packet-based format used to transmit it on the IP-routers and Internet (10, 20, 30) into a conventional GSM format such as a time-slot format.

The receive signal RX, in timeslot format, is forwarded from the A-interface gateway 8 to the Mobile Services switching centre 26 (MSC) in the GSM Network from where it is transmitted to the respective Base Station Controller/Base transceiver station 24, under which the mobile station B is operating, in a manner conventional to GSM.

Calls which are completely internal to the WIO system are handled slightly differently as shown in Figure 1c. The RF transmission signal TX, in timeslot format, transmitted by the mobile A is again sent to the BTS 2 which performs down conversion of the signal. The down-converted signal is forwarded to the intranet mobile cluster interface 3 which performs format conversion to generate a PAYLOAD packet and a CTRL packet.

From the intranet mobile cluster interface 3, the control signal CTRL is sent to the Gatekeeper 4 which determines if the mobile station B is within the WIO system and, if so, in which H.323 Zone it is located. A H.323 zone is defined as the collection of all terminals, gateways and multipoint control units managed by a single gatekeeper.

If the mobile station B is operating in the same H.323 Zone as the mobile station A, i.e. under the same Gatekeeper which then starts the paging procedure, the Gatekeeper 4 will receive a paging response from the destination intranet mobile cluster interface 23, i.e. the intranet mobile cluster interface under which the mobile station B is operating, and then routes the payload along the IP-router 10 to that destination intranet mobile cluster interface.

The destination intranet mobile cluster interface 23 converts the payload signal into a timeslot format. It is then sent, via its base transceiver station 24 which performs up-conversion to RF, to the mobile station B.

As shown in Figure 1d, if the gatekeeper 4 determines that the mobile station B is in a different H.323 Zone to the mobile station A, the gatekeeper 4 routes the payload signal to the destination gatekeeper 4', i.e. the gatekeeper under which the mobile station B is operating. If the destination gatekeeper receives a paging response from one of the intranet mobile cluster interfaces, it then routes the call signal to the intranet mobile cluster interface and out to the mobile station B, via its base transceiver station 24, in a manner similar to that described above.

Figures 2 to 6 show, respectively, the communication pathways before, during and after a handover according to an embodiment of the present invention. The following description illustrates the handover of a mobile station A from a first cell of the WIO network to a second cell of the WIO network whilst in communication with a mobile station B also located within the network.

In this context, the components of the first cell, i.e. the cell out of which mobile station A will move, are termed the source components while the components of the second cell, i.e. the cell into which mobile station A will move, are termed the target components. The components of the cell in which mobile station B is located are termed the destination components. Note that the destination mobile station could be any other endpoint or terminal such as fixed phone, fax etc.

As shown in Figure 2, before the handover, mobile station A communicates with mobile station B by transmitting an RF, timeslot-based signal to the source base transceiver station 2 which down-converts the signal and sends it to the source

intranet mobile cluster interface 3. The source intranet mobile cluster interface converts the voice data into a packet-based format (PAYLOAD) and sends it, via the MCU 28, to the destination IMC 23. A CTRL 1 message is formulated and sent to the gatekeeper 4. The gatekeeper 4 identifies from the CTRL message the destination terminal as the mobile station B and then sends a further packet-based signal CTRL, via the IP-router 10, to the destination intranet mobile cluster interface 23. The destination intranet mobile cluster interface 23 converts the PAYLOAD into GSM timeslot format and forwards it to the destination base transceiver station 24 which up-converts the signal to RF and transmits it to mobile station B.

When the IMC 3 determines, in the manner described earlier, that a handover of MSA to another cell is required the IMC issues handover required indication HR1. The IMC 3 also generates, based on the levels of the signals the MSA has reported as having been received from the surrounding base transceiver stations, a list of suitable target base transceiver stations 22 to which the call could be handed over.

The gatekeeper 4 is provided by the HR1 with a candidate list which is a list of cell identifiers (i.e. local Area Code and cell identifier) which the gatekeeper resolves into a choice of target gateways. For the purposes of the following description it is assumed that all the calls are switched via the MCU 28. However Q931 signalling (CTRL) does not go through the MCU. The gatekeeper 4 controls the MCU via MC-CTRL packets.

When the gatekeeper 4 receives the HRI message and the candidate list from the source intranet mobile cluster interface 3, it selects a target IMC 21 from the candidate list.

The gatekeeper 4 then invites the target intranet mobile cluster interface 21 to connect to the multipoint control unit 28 so as to form a multipoint conference. In this manner, a communications link between the target intranet mobile cluster

interface 21 and the multipoint control unit 28 is set up by the gatekeeper 4. However, the existing link between the source mobile cluster interface and the multipoint control unit 28 is not disconnected at this time.

From Figure 4 it can be seen that once the communications link between the target intranet mobile cluster interface 21 has been set up by the gatekeeper 4, the mobile station A is, in fact, communicating with the multipoint control unit 28 via two separate communications links: firstly via the source base transceiver station and the source intranet mobile cluster interface and secondly via the target base transceiver station 22 and the target intranet mobile cluster interface 21.

As illustrated in Figure 4a, the multipoint control unit 28 is operable to multiplex the PAYLOAD packets input to it. Signals transmitted by the mobile station A are input to it twice - firstly (S) from the source intranet mobile cluster interface 3 and secondly (T) from the target intranet mobile cluster interface 21. These signals are multiplexed together and sent to the destination mobile station B via IMC 23. Similarly, the signal (D) transmitted by the destination mobile station B is input to the multipoint control unit 28 from the destination intranet mobile cluster interface 23 and is routed by the multipoint control unit 28 both to the source intranet mobile cluster interface 3 and to the target intranet mobile cluster interface 21.

There is in effect, therefore, a three-way multipoint conference taking place with the three endpoints being the mobile station A in the source cell, the mobile station A in the target cell and the mobile station B in the destination cell. Such a multipoint conference is known *per se* and is described in H.323 protocol.

Once the three-way multipoint conference has been established and the call is successfully connected at the target IMC, the

gatekeeper 4 then operates to disconnect the original communications links between the source intranet mobile cluster interface 3 and the multipoint control unit 28 (Figure 5).

In other words, the original communications link between the mobile station A and the multipoint control unit 28 are not disconnected until the new connections have been established, i.e. handover has been effected to a level which is satisfactory to the gatekeeper 4. This means that the original call path can continue to be utilised if handover is not successful at the target IMC.

At this point, the handover is considered to be completed.

In this manner, the mobile station A is handed over from a first cell of the WIO system to a second cell. Since the old communications links from the source cell are not disconnected until some time after the new links are set up, data loss is reduced.

Thus, breaks in the packet stream are minimised reducing packet loss and improving communications links. Also, the handover of MSA is invisible for user B.

CLAIMS:

1. A communications network comprising:

a central controller which operates to control a zone of the network and which provides a conference call facility;

at least one gateway engaged in a call with a mobile station via a first communication channel;

means for generating a hand-off required indication indicating that handover of the call is needed;

means at the central controller for receiving said hand-off required indication and opening a conference call channel as a second communication channel for the call; and

means for handing over said call from the first to the second communication channels and, if the handover is successful, causing the first communication channel to be closed.

2. A network according to claim 1, which comprises a switched packet communication path by means of which the means for handing over, central controller and the gateway are connected.

3. A network according to claim 1 or 2, wherein the gateway comprises packet generating means for generating a packet addressed to said means for handing over including control information comprising a candidate list of alternative cells to which the call could possibly be transferred.

4. A network according to any preceding claim, wherein the gateway is operable to receive RF information from a mobile station, said RF information including call data, and to convert said RF information into a packet for transmission to the gatekeeper.

5. A network according to any preceding claim, wherein the central controller is operable to multiplex the first and second communication channels, such that the call is conveyed simultaneously by both of said channels until the first communication channel is closed.

6. A network according to claim 3, wherein the gatekeeper comprises means for selecting a target gateway based on the cells in the candidate list, and for causing said central controller to open the conference call channel to said selected target gateway as a second communication channel.

7. A network according to any preceding claim, which is an internal cellular communications network and which comprises an interface for connection to an external network which includes an external controller such that said call can comprise a first mobile station in the internal cellular communications network and a second mobile station in the external network.

8. A method of effecting handover of a call in which at least one mobile station is engaged via a first communication channel in a communications network comprising a central controller which operates a zone of the network and provides a conference call facility, in which method:

a hand-off required indication is issued indicating that handover of the call is needed;

the central controller receives said hand-off required indication and opens as a second communication channel a conference call channel;

handover of said call is effected from said first to said second communication channel; and

if the handover is successful the first communication channel is closed.

9. A method according to claim 8, wherein the hand-off required indication comprises a packet which is conveyed to the central controller via a switched packet communications path of the network.

10. A method according to claim 8 or 9, wherein the mobile station transmit call data as an RF signal, said call data being converted into a packet for transmission via a switched packet communications path of the network.

11. A method according to claim 8, 9 or 10, which comprises the step of multiplexing the call via the first and second communication channels at the central controller, prior to closing the first communication channel.

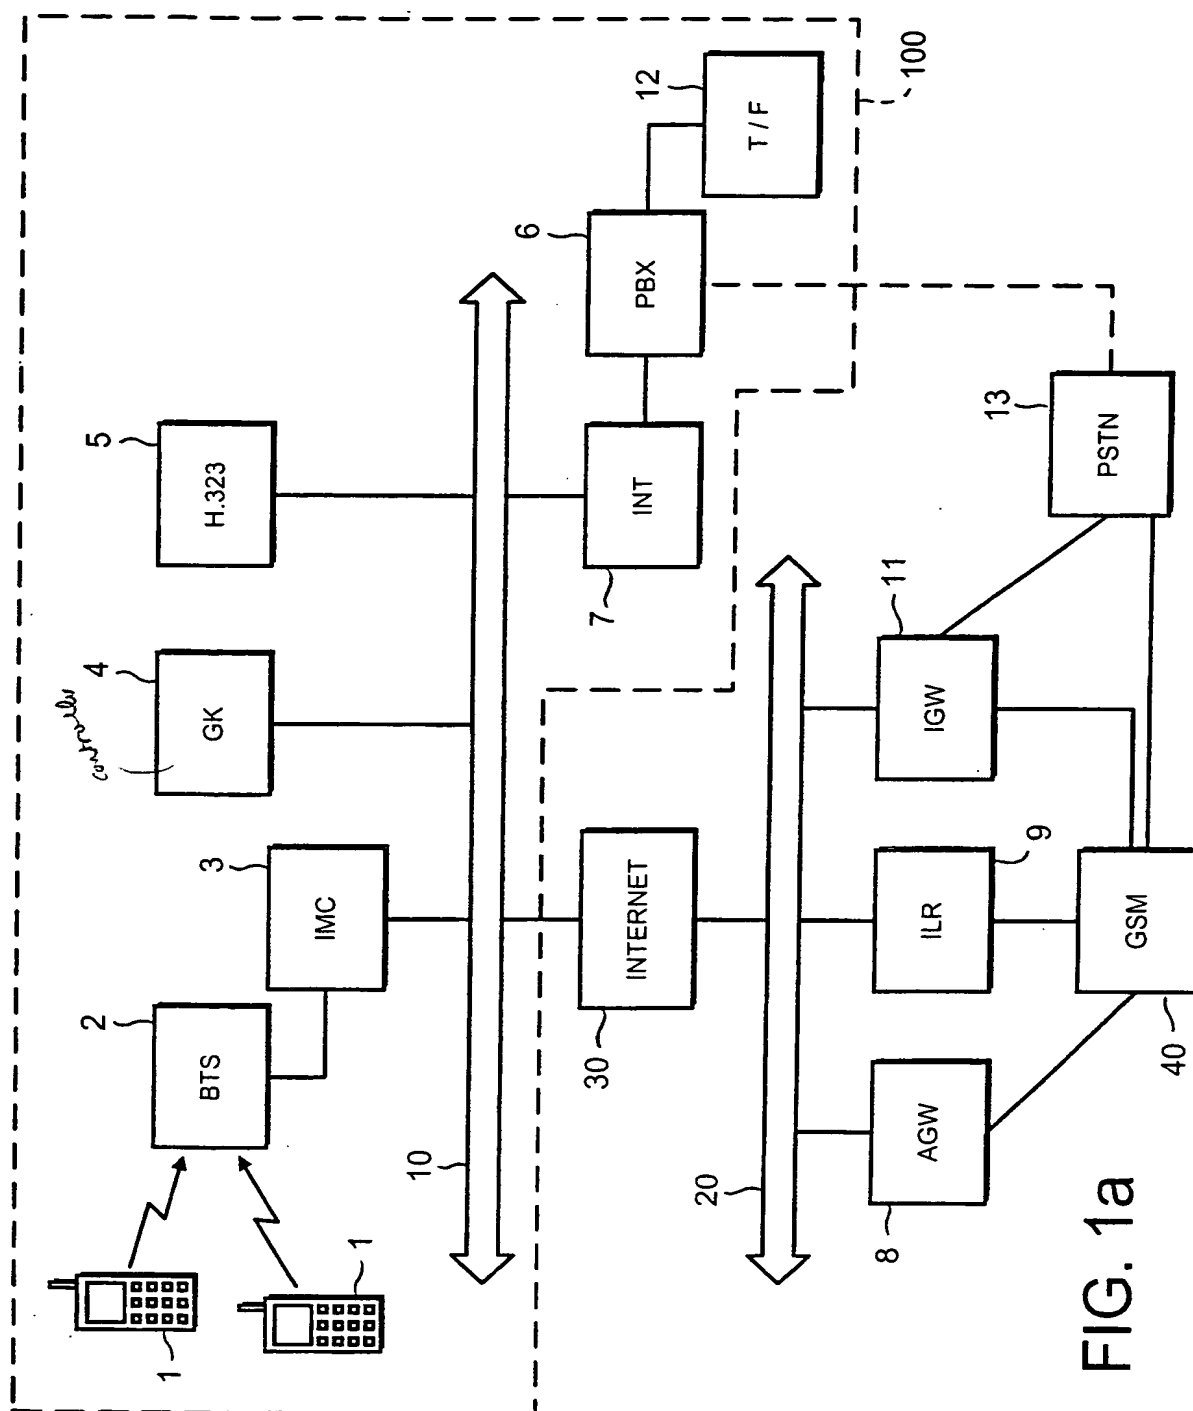
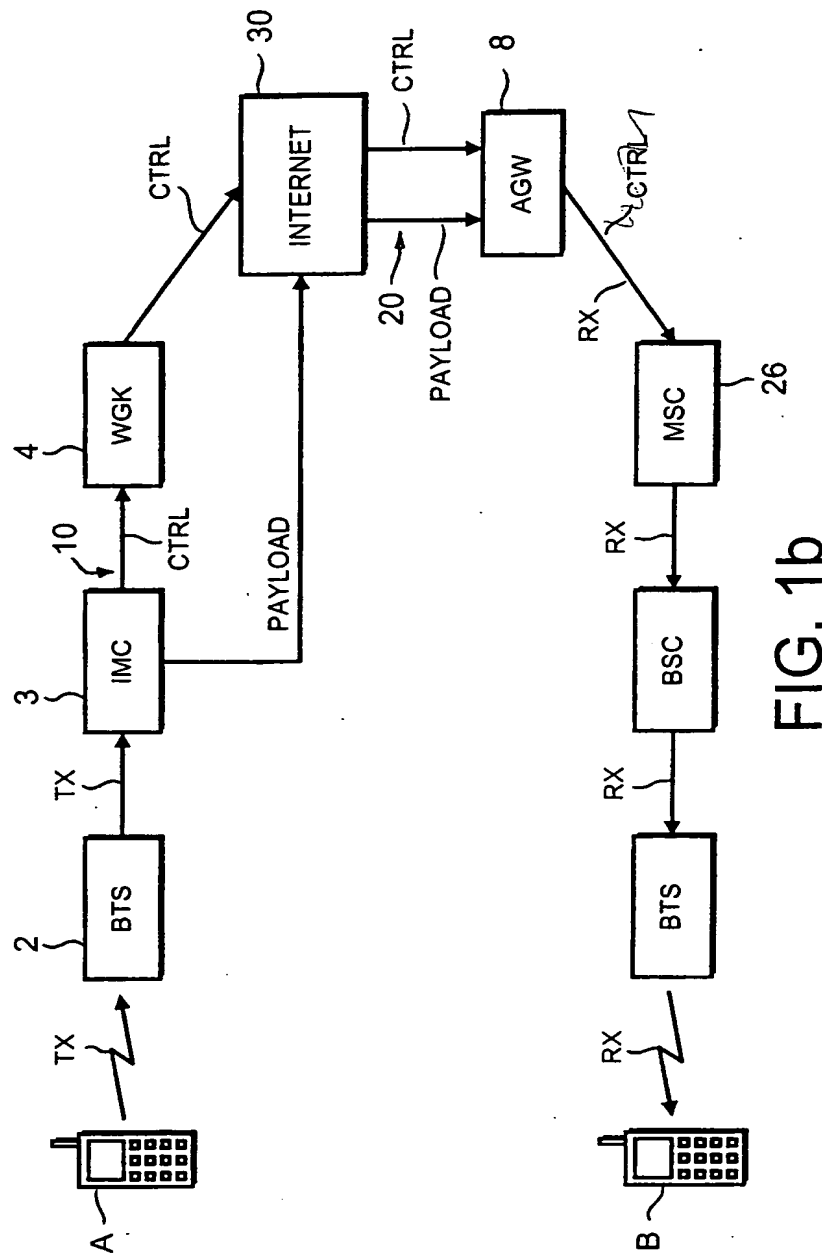


FIG. 1a



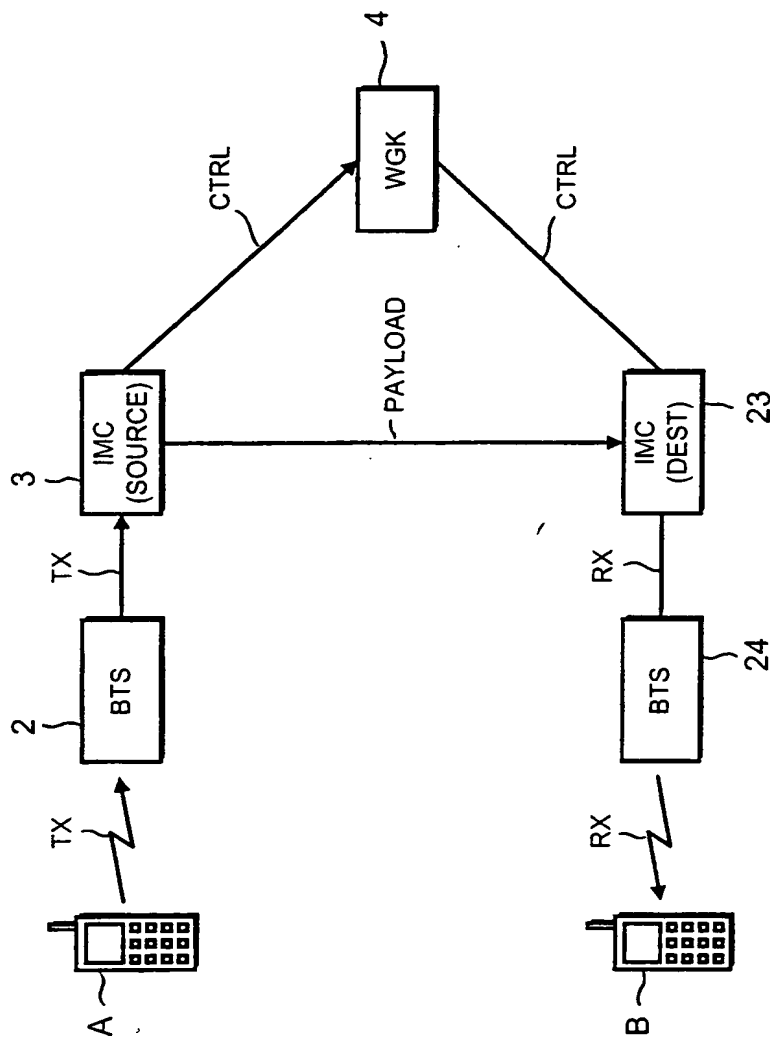


FIG. 1c

